PHILIPPINE NATIONAL STANDARD

PNS/BAFS 324:2021

Solar Powered Irrigation System -**Specifications**



BUREAU OF AGRICULTURE AND FISHERIES STANDARDS

BPI Compound Visayas Avenue, Diliman, Quezon City 1101 Philippines
Trunkline: (632) 928-8741 to 64 loc. 3301-3319
E-mail: bafs@da.gov.ph
Website: www.bafs.da.gov.ph

Foreword

The Bureau of Agriculture and Fisheries Standards (BAFS) was directed to prioritize the development of the Philippine National Standards (PNS) on Solar Powered Irrigation System (SPIS) pursuant to a Memorandum signed by the Department of Agriculture Secretary dated July 30, 2018, entitled "Preparation of Philippine Agricultural Engineering Standards for SPIS". A Technical Working Group (TWG) was created to develop the PNS under Special Order No. 817, series of 2021 (Addendum to Special Order No. 81 series of 2021 entitled, "Creation of TWG for the Development of PNS for Agriculture and Fishery Products, Machinery, and Equipment"), which is composed of representatives from relevant government agencies, academe, research institution, civil society organizations, and private sector. The draft PNS underwent a series of TWG meetings and stakeholder consultations conducted via online platforms before their endorsement to the Secretary for approval.

This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2.

PHILIPPINE NATIONAL STANDARD Solar Powered Irrigation System – Specifications

Contents

For	eword	ii
1	Scope	1
2	Normative References	1
3	Terms and Definitions	2
4	Classification	4
5	Construction and Structural Requirements	6
6	Performance Requirements	9
7	Safety Requirements	9
8	Equipment and Accessories	9
9	Warranties for Construction	9
10	Maintenance	10
11	Operation	10
12	Testing	10
Bibl	iography	11

1 Scope

This standard specifies the minimum specification and construction and performance requirements for Solar Powered Irrigation System (SPIS).

2 Normative References

The following documents are referred to in the text in such a way that some or all of their contents constitute the requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

- Bureau of Agriculture and Fisheries Standards (BAFS) Department of Agriculture (DA). (2016). Guidelines on after-sales service (PNS/BAFS/PAES 192:2016). http://amtec.ceat.uplb.edu.ph/wp-content/uploads/2020/06/PNS-BAFS-192.2016-Guidelines-on-After-sales-services.pdf
- BAFS-DA. (2021). Solar Powered Irrigation System Methods of Test (PNS/BAFS 325: 2021).
- Institute of Integrated Electrical Engineers of the Philippines (IIEEP). Philippine electrical code. https://www.pdf-archive.com/2016/06/03/philippine-electrical-code.pdf
- International Electrotechnical Commission (IEC). (2013). Degrees of protection provided by enclosures (IP Code) (IEC 60529:1989+A1:1999+A2:2013). https://webstore.iec.ch/publication/2452
- IEC. (2021). Terrestrial photovoltaic (PV) modules Design qualification and type approval Part 1: Test requirements (IEC 61215-1:2021). https://webstore.iec.ch/publication/61345
- National Fire Protection Association (NFPA). (2020). National electrical code. https://www.nfpa.org/codes-and-standards/list-of-codes-and-standards/detail?code=70
- Philippine Agricultural Engineering Standards (PAES) Task Force. (2000).

 Centrifugal, mixed flow and axial flow water pumps Methods of test (PAES 115:2000). https://amtec.ceat.uplb.edu.ph/wp-content/uploads/2019/07/PAES-115-2000.pdf
- PAES Task Force. (2000). Centrifugal, mixed flow and axial flow water pumps Specifications (PAES 114:2000). https://amtec.ceat.uplb.edu.ph/wp-content/uploads/2019/07/PAES-114-2000.pdf
- PAES Task Force. (2000). Operator's manual content and presentation (PAES 102:2000). https://amtec.ceat.uplb.edu.ph/wp-content/uploads/2019/07/PAES-102-Operators-Manual-Content-and-Presentation.pdf

Republic of the Philippines. (1977). Adopting a National Building Code of the Philippines (NBCP) thereby revising Republic Act (RA) No. 6541 (Presidential Decree 1096). https://www.officialgazette.gov.ph/1977/02/19/presidential-decree-no-1096-s-1977/

3 Terms and Definitions

For the purpose of this standard, the following terms and definitions shall apply:

3.1

angle of inclination

the tilt of the PV module with respect to the horizontal plane

3.2

controller

link between motor pump and solar generator that regulates the operation of PV array to pump and is classified into two types: inverter (directly connected to pump set) and charge controller (with batteries)

3.2.1

charge controller

monitors the charging and discharging of the battery connected to the PV array

3.2.2

inverter

converts DC current from PV module to AC

3.3

photovoltaic (PV) array

composed of PV modules connected in combination of series and parallel connections, which convert energy from the sun into electrical energy

3.4

pump

agricultural machinery that is used to lift or transfer water from one source to another

3.4.1

submersible pump

pump designed to operate fully submerged in the water source

3.4.2

surface pump

pump designed to operate above water surface

3.5

PV module

solar panel

assembly of photovoltaic cells mounted in a frame that uses sunlight as a source of energy to generate a DC electricity

3.6

PV performance ratio

ratio of the input solar power to the PV module and the output power of the inverter/controller

3.7

ray of incidence

the angle with which a ray of sunlight strikes the surface of the PV module, measured with respect to a line perpendicular to said surface

3.8

reservoir

water tank

temporary water storage that adds kinetic energy to facilitate water distribution

3.9

solar irradiance

amount of solar energy received by or projected onto a surface, expressed in Watts per square meter (W/m²)

3.10

Solar Powered Irrigation System (SPIS)

irrigation system powered by solar energy, using PV technology, which converts solar energy into electrical energy to run a DC or AC motor-based water pump. It consists of solar PV modules, pump set, electronic controls to operate the pump, the required hardware, and in some cases other items like inverters and batteries

3.11

suction lift

the vertical distance from the free suction water level to the center line of the pump suction

3.12

system efficiency

ratio of the output power of the pump set and the total solar input power

3.13

total dynamic head

total head

measure of energy increase imparted to the water by the pump and expressed by the algebraic difference between the total discharge head and total suction head, expressed in meters (m)

4 Classification

4.1 SPIS Configuration

The following are the typical configurations for an SPIS as shown in Figures 1-4:

4.1.1 Surface Water Source with Reservoir

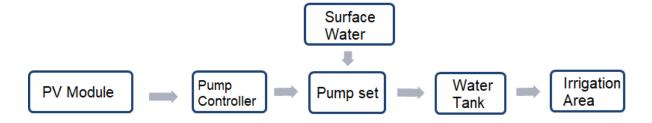


Figure 1. Configuration setup for a surface water source with reservoir

4.1.2 Surface Water Source without Reservoir

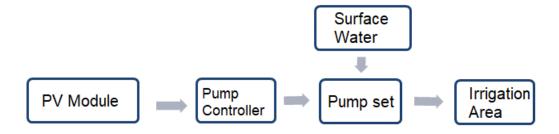


Figure 2. Configuration setup for a surface water source without reservoir

4.1.3 Groundwater Source with Reservoir

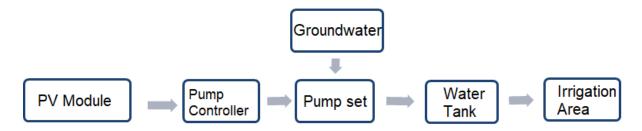


Figure 3. Configuration setup for a groundwater source with reservoir

4.1.4 Groundwater Source without Reservoir

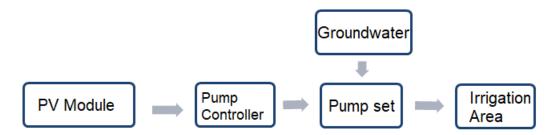


Figure 4. Configuration setup for a groundwater source without reservoir

4.2 Pumpset

There are two types of pumps that could be used for the irrigation system, depending on the location of installation namely, surface and submersible pumpsets.

4.2.1 Surface Pumpset

Pumpsets in which suction inlets are not submerged in water.

4.2.2 Submersible Pumpset

Pumpsets installed below water level.

4.3 Controller

The following are two types of controller:

4.3.1 Inverter

- **4.3.1.1** converts DC power to AC power
- **4.3.1.2** converts DC power to DC power (voltage conversion)

4.3.2 Charge Controller

- **4.3.2.1** Maximum Power Point Tracking (MPPT)
- **4.3.2.2** Pulse Width Modulation (PWM)

4.4 Irrigation Method

4.4.1 Open Channel

Flow of water affected by atmospheric and surface conditions.

4.4.2 Closed Channel

The flow of water in completely filled conduits, where no free water surface exists or where surface conditions, is insignificant.

5 Construction and Structural Requirements

Figure 5 illustrates an example of SPIS. The major components of SPIS are the PV modules, pumpset, and controller.

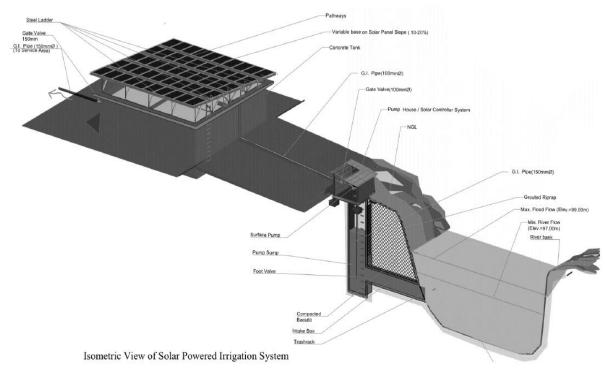


Figure 5. Example of an SPIS

5.1 PV Array

5.1.1 Mounting Rails of PV Array

The panels in the PV array should be installed with a rigid alloy rail made of non-corrosive material.

5.1.2 Mounting Frame Material

The mounting frame structure should be made from Galvanized Iron (GI) pipes or angular bars that are either primed, hot dipped galvanized with minimum of 5 mils or double coated with non-corrosive paint.

5.1.3 Type of PV Module

A uniform type and specifications of PV modules, either monocrystalline or polycrystalline, shall be used for the whole array.

5.1.4 Gustiness, Uplift, and Degradation

The PV modules shall be able to withstand a minimum gustiness and uplift of 180 kph. The standard degradation should be a minimum of 0.5% annually as per IEC 61215-1:2021 (Terrestrial photovoltaic (PV) modules – Design qualification and type approval – Part 1: Test requirements).

5.1.5 Orientation

The orientation of the PV array shall be as per site assessment. It is recommended that the PV array should be facing the south based on efficiency and performance.

5.1.6 Angle of Inclination

The angle of inclination in degrees for the PV array shall be dependent on latitude of the location maximizing solar energy to be harvested.

5.1.7 Location

Placement of the PV array shall be away from any source of shades any time of the year. If applicable, the site of installation shall be cleared of any trees and other obstructions.

5.1.8 Spatial Requirements

The spatial distance between each PV modules should be at least 20 mm.

5.2 Pumpset

5.2.1 Requirements

The type, capacity of pump, suction and discharge pipe material, and other basic components shall be dependent on the design of the SPIS.

5.2.2 Protection

Dry running, overheating, overloading, voltage transient, and low/high voltage input protection shall be provided for the pumpset.

5.2.3 Pump Intake

A trash rack, made of non-corrosive material or painted with protective coating, shall be installed along with the pump intake. The orientation of the pump shall be dependent on the system design (e.g. submersible or surface).

5.2.4 Pumpset Installation Based on Water Source

The pumpset to be used shall be dependent on the water source and total head. Casings for groundwater sources shall be provided.

5.2.5 Pump Discharge

A discharge measuring device, such as flow meter or water meter, should be included with the pumpset.

5.3 Solar Panel Controller

5.3.1 Protection

The pumpset controller and the PV array controller shall be insect-proofed and weather-proofed by using double-proof box and sealants.

5.3.2 Ingress Protection (IP) Ratings Used

A minimum of IP58 (splash proof) rating shall be used as per IEC 60529:1989+A1:1999+A2:2013 (Degrees of protection provided by enclosures [IP Code]).

5.3.3 Circuit Breaker Housing

The solar panel controller should be encased with a combiner box.

5.3.4 Size of Controller

The capacity of inverter shall be at least 25% higher than pumpset input power requirement.

5.3.5 Controller

The controller shall be fully automated based on manufacturers' specifications.

5.4 Cables and Wires

Cables and wirings used for the SPIS shall be in accordance with the Philippine Electrical Code (PEC), using PV cables specific for PV modules. Wiring installations shall be properly protected for weather conditions and other external factors.

5.5 Reservoir (optional)

If installed, the design of the reservoir should indicate that the intake be at least equal to the outflow during operation. The reservoir shall be able to withstand the design load. The water storage should also include a ladder, drain and overflow sensor, a freeboard, and an intake and outflow valves. Construction shall be in accordance to the NBCP (RA 6541).

6 Performance Requirements

6.1 The performance of SPIS shall be in accordance with the criteria specified in Table 1.

Table 1. Performance criteria for SPIS

Criteria	Performance Data	
	Surface Pump	Submersible Pump
Maximum PV Performance Ratio (Monocrystalline)	22.62	16.34
Maximum PV Performance Ratio (Polycrystalline)	22.24	20.22

6.2 The pump set shall have a test report with pump/performance curve prior to installation.

7 Safety Requirements

- **7.1** A Rapid Shutdown Device (RSD) shall be installed for roof-mounted panels.
- **7.2** Lightning arrester shall be installed in accordance with Article 2.80 (Surge Arresters) of the National Electrical Code (NEC).
- **7.3** Warning signs shall be installed for electrical components on-site.
- **7.4** Surge Protection Devices (SPD) shall be installed along with the PV module.
- **7.5** Personal Protective Equipment (PPE) shall be provided for each operator on site.

8 Equipment and Accessories

- **8.1** Communication devices should be provided on site.
- **8.2** Multi-testers should be provided on site.

9 Warranties for Construction

- **9.1** Warranty shall be provided for parts and services except for normal wear and tear of the following components:
- **9.1.1** Pumps shall have at least one year warranty.
- **9.1.2** Workmanship warranty shall be at least one year.

- **9.1.3** PV module shall have at least 10 years for material warranty and 25 years performance warranty.
- **9.1.4** Inverters shall have at least one year warranty.
- **9.2** Warranty shall cover those specified under PNS/BAFS 192:2016 (Guidelines on after-sales service). In addition, pest infestation is not covered in the warranty.

10 Maintenance

- **10.1** Each unit shall be provided with the following basic hand tools including, but not limited to, one set of each of the following: adjustable wrench, pipe wrench, box and open wrenches, Philips, and flat screw-driver.
- **10.2** The grease points for lubrication of mechanical parts should be provided.
- **10.3** Solar panels shall be cleaned using the proper tools and procedures based on manufacturer's manual.
- **10.4** Cleaning of the solar panels should be performed as the need arises.
- **10.5** Weeds and grass should be cut when nearing or going above the height of the solar panel array.
- **10.6** Maintenance of components shall be performed with proper tools and equipment.

11 Operation

- **11.1** Operators shall wear appropriate clothing, along with the provided PPE during operating hours at all times.
- **11.2** The operators' manual based on the PAES 102:2000 (Agricultural machinery Operators manual Content and presentation), maintenance schedule, and a list of warrantable parts of the SPIS shall be provided.
- **11.3** Readout of voltage and current of running motor, along with other necessary warnings shall be provided on-site.

12 Testing

The SPIS shall be tested in accordance with PNS/BAFS 325:2021 (Solar Powered Irrigation System – Methods of Test).

Bibliography

- Eusebio, R.E., Albalos, R.M.C., Magmalac, A.R.R., Fajardo, A.L., & Aranguren, D.C. (2020). Performance status of solar-powered irrigation systems tested by the agricultural machinery testing and evaluation center in the Philippines. Philippine Agriculture and Biosystems Engineering Journal, 3(1). https://amtec.ceat.uplb.edu.ph/wp-content/uploads/2021/01/JOURNAL-2_11_27_20-3.pdf
- Holthaus, J., Pandey, B., Foster, R., Ngetich, B., Mbwika, J., Sokolova, E., & Siminyu, P. (2017). Accelerating Solar Water Pump Sales in Kenya: Return on Investment Case Studies. Proceedings of SWC2017/SHC2017. https://doi.org/10.18086/swc.2017.30.03
- Khamisani, A. A. (2018). Design methodology of off-grid PV solar powered system (A case study of solar powered bus shelter). Eastern Illinois University. https://www.eiu.edu/energy/Design%20Methodology%20of%20Off-Grid%20PV%20Solar%20Powered%20System_5_1_2018.pdf
- Morales, T.D. (2010). Design of small photovoltaic (PV) solar-powered water pump system (The Natural Resources Conservation Service United States Department of Agriculture Technical Note No. 28).

 https://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_046471.p
- Nathanson, J. A. (2010). Water supply system. Encyclopaedia Britannica, Inc. https://www.britannica.com/technology/water-supply-system
- Sass, J., & Hahn, A. (2020). Solar powered irrigation systems (SPIS): Technology, economy, impacts. Deutsche Gesellschaft für, Internationale Zusammenarbeit (GIZ) GmbH.
- Scherer, T.F. (2017). Irrigation water pumps. North Dakota State University. https://www.ag.ndsu.edu/publications/crops/irrigation-water-pumps#section-3

Department of Agriculture (DA)

Bureau of Agriculture and Fisheries Standards (BAFS)

Technical Working Group (TWG) for the Philippine National Standard (PNS) on Solar Powered Irrigation System (SPIS) – Specifications and Methods of Test

Chairperson

Engr. Desiree Joy Salvatera Bureau of Agricultural and Fisheries Engineering (BAFE)-DA

Members

- 1 Engr. Alexander Nicole Tan
- 2 Engr. Jessa Rica Pandiño BAFE-DA
- 3 Engr. Mara Segreid Bustos Philippine Council for Agriculture and Fisheries (PCAF)-DA
- 4 Engr. Reynaldo Gregorio
 Philippine Center for Postharvest
 Development and Mechanization
 (PHilMech)-DA
- 5 Jimmy Planas
- 6 Peter Sablay
- 7 Rodrigo Andrew Cananan
- 8 Percival Garcia II
- 9 Arnulfo Zabala Renewable Energy Management Bureau (REMB)-DOE

- 10 Engr. Romulo Eusebio
- Engr. Mary Christine Agoncillo
 Agricultural Machinery Testing
 and Evaluation Center (AMTEC)
 University of the Philippines
 Los Baños (UPLB)
- 12 Erel Narida
- 13 Bernard Baltazar
 Renewable Energy Association
 of the Philippines (REAP)

BAFS Management Team

Karen Kristine Roscom Gari Pellinor Hernandez, DVM Timothy Justine Regalado

Advisers

Myer Mula, PhD Vivencio Mamaril, PhD



BUREAU OF AGRICULTURE AND FISHERIES STANDARDS

BPI Compound Visayas Avenue, Diliman, Quezon City 1101 Philippines T/ (632) 928-8741 to 64 loc. 3301-3319
E-mail: info.dabafs@gmail.com
Website: www.bafs.da.gov.ph